


이중보온관의 규격

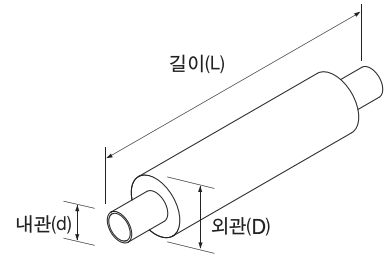

/ 중온수용 - 매설용(16bar) /

(UNIT : mm)

규격 Dia.(DN)	재질 (Mat'l)	내관		보온재(MIN.)		외관(HDPE)			길이 (M)
		두께 (T)	외경 (D)	이형관	직관	두께(T)		외경 (D)	
						이형관	직관		
20	SPPS 380S/E	2.9	27.2	27.1	26.8	2.8	3.0	90	6,000
25		3.4	34.0	23.7	22.4	2.8	3.0	90	
32		3.6	42.7	28.9	28.8	3.3	3.0	110	
40		3.7	48.6	25.9	25.8	3.3	3.0	110	
50		3.9	60.5	27.3	27.2	3.5	3.0	125	
65		4.5	76.3	26.5	26.5	3.9	3.0	140	
80		4.5	89.1	30.0	29.9	4.0	3.0	160	
100		4.9	114.3	36.2	36.2	4.4	3.5	200	
125		5.1	139.8	35.5	35.6	4.9	3.5	225	
150		5.5	165.2	34.7	34.4	5.5	4.0	250	
200	SPPS 380E	6.4	216.3	40.2	38.5	6.9	5.6	315	12,000
250		6.4	267.4	55.4	53.6	8.7	6.3	400	
300		6.4	318.5	53.0	51.6	9.8	7.0	450	
350		6.4	355.6	58.3	56.4	10.9	7.8	500	
400		6.4	406.4	61.6	62.1	12.2	8.8	560	
450		6.4	457.2	69.7	70.0	13.7	9.8	630	
500		6.4	508.0	81.5	82.4	15.5	11.1	710	
550		9.5	558.8	56.1	56.8	15.5	11.1	710	
600		9.5	609.6	73.7	74.2	17.5	12.5	800	
650		8.7	660.4	71.3	74.3	19.5	12.5	850	
700	8.7	711.2	70.9	73.1	19.5	12.9	900		
750	8.7	762.0	70.5	72.3	19.5	12.9	950		
800	SPW 400	9.5	812.8	67.8	71.1	21.8	13.3	1000	
850		10.3	863.6	91.6	94.5	22.6	13.8	1100	
900		10.3	914.4	66.2	69.0	22.6	13.8	1100	
1000		11.1	1016.0	61.8	66.5	26.2	14.6	1200	
1100		11.1	1117.6	59.1	64.6	28.1	15.0	1300	

※ 한국지역난방공사 제품 2017년 사양기준
 ※ 수요자의 요구에 따라 사양 변경 가능

