


상수도용 이중보온관 규격

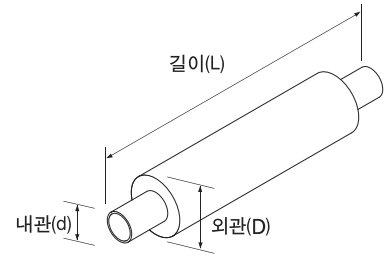

/ 상수도용 이중보온관 (구 KS PE수도관) /

관경	내관(PE)			외관(AL-Spiral / HDPE)				비고
	재질(Mat'l)	외경(mm)	두께(T)	AL-Spiral		HDPE		
				외관경(mm)	보온두께(T)	외관경(mm)	보온두께(T)	
16A	KSM3408	21.50	2.50	90.00	33.65	90.00	31.75	
20A	KSM3408	27.00	3.00	90.00	30.90	90.00	29.00	
25A	KSM3408	34.00	3.50	90.00	27.40	90.00	25.50	
30A	KSM3408	42.00	4.00	110.00	33.40	110.00	31.00	
40A	KSM3408	48.00	4.50	110.00	30.40	110.00	28.00	
50A	KSM3408	60.00	5.50	125.00	31.90	125.00	29.30	
65A	KSM3408	76.00	6.60	140.00	31.40	140.00	28.80	
75A	KSM3408	89.00	8.10	160.00	34.70	160.00	32.30	
100A	KSM3408	114.00	10.40	200.00	42.00	200.00	39.50	
125A	KSM3408	140.00	12.70	225.00	41.50	225.00	39.00	
150A	KSM3408	165.00	15.30	250.00	41.50	250.00	38.50	
200A	KSM3408	216.00	19.50	315.00	48.50	315.00	43.90	
250A	KSM3408	267.00	24.30	400.00	65.50	400.00	60.20	
300A	KSM3408	318.00	28.90	450.00	64.80	450.00	58.20	

내외관은 용도와 주문자 사양에 따라 변경 가능(내관 종류 : 등관, SUS관, 도복장 강관, 주철관, 주름관 등)

