


이중보온관의 규격

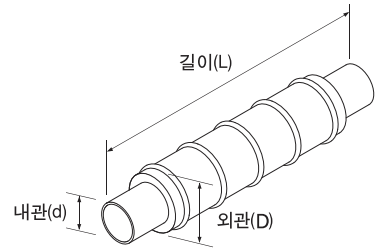

/ 동파방지용(상하수도) - 노출용 /

(UNIT : mm)

규격Dia. (DN)	재질 (Mat' l)	내관			외관(HDPE)			보온재		단위중량 (kg/m)	길이(M)
		외경(D)	두께(T)	단위중량 (kg/m)	외경(D)	두께(T)	단위중량 (kg/m)	두께(T)	단위중량 (kg/m)		
80A		89.1	4.5	9.39	175	0.8	1.19	42.15	1.44	12.02	6,000
100A		114.3	4.9	13.22	200	1.0	1.69	41.85	1.70	16.61	
125A		139.8	5.1	16.95	225	1.0	1.90	41.60	1.96	26.81	
150A		165.2	5.5	21.67	250	1.0	2.12	41.40	2.23	26.02	
200A		216.3	6.4	33.13	325	1.0	2.75	53.35	3.75	39.63	
250A		267.4	6.4	41.20	400	1.0	3.39	65.30	5.66	50.25	
300A		318.5	6.4	49.26	450	1.2	4.57	64.55	6.44	60.27	
350A		355.6	6.0	51.73	500	1.2	5.08	71.00	7.89	64.70	
400A		406.4	6.0	59.25	550	1.2	5.59	70.60	8.78	73.62	
450A		457.2	6.0	66.76	650	1.2	6.61	95.20	13.71	87.08	
500A		508.0	6.0	74.28	700	1.2	7.12	94.80	14.90	96.30	
550A	STWW290	558.8	6.0	81.80	750	1.2	7.62	94.40	16.07	105.49	
600A	STWW370	609.6	6.0	89.31	800	1.2	8.13	94.00	17.24	114.68	
650A	STWW400	660.4	7.0	112.79	850	1.2	8.64	93.60	18.40	139.83	
700A		711.2	7.0	121.56	900	1.2	9.15	93.20	19.54	150.25	
750A		762.0	7.0	130.33	950	1.2	9.66	92.80	20.68	160.67	
800A		812.8	8.0	158.78	1,000	1.2	10.17	92.40	21.60	190.75	
850A		863.6	8.0	168.80	1,050	1.2	10.68	92.00	22.92	202.40	
900A		914.4	8.0	178.82	1,100	1.2	11.19	91.60	24.02	214.03	
1000A		1016.0	9.0	223.50	1,200	1.2	12.20	90.80	26.20	261.90	
1100A		1117.6	10.6	273.14	1,300	1.2	13.22	90.00	28.33	314.69	
1200A		1,219.2	11.2	327.74	1,400	1.2	14.24	89.20	30.43	372.41	
1350A		1,371.6	12.6	402.34	1,550	1.2	15.77	88.00	33.49	451.60	
1500A		1,524.0	13.0	484.40	1,700	1.2	17.29	86.80	36.45	538.14	

※ 수요자의 요구에 따라 사양 변경 가능

